


Datasheet

ROV shackle - Gunnebo retrieve 861

- The Gunnebo lifting ROV Retrieve Shackle is designed for smooth and easy use in retrieving and releasing subsea lifting and rigging operations
- It has no loose parts, in closed or open position, and there is therefore no need for wires or monkey fists that will risk snagging or getting in the way
- High visibility handles are close-die forged and has double functions - shark tooth locking with indicator that will show if the shackle is in open or locked position as well as the spring loaded handle
- The handle is the same size, regardless of size of the shackle
- High tensile steel, quenched and tempered
- Dim. according to EN 13889 and US Fed. Spec. RR-C-271
- Sizes 12 - 25 tonnes -40° C til $+200^{\circ}$ C
- Sized 35 - 55 tonnes -20° C til $+200^{\circ}$ C

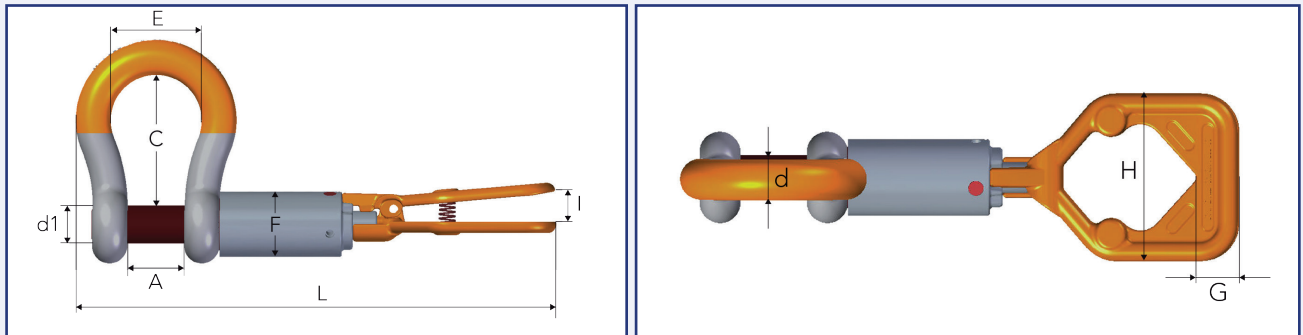

Article-number	WLL with SF 6:1	d1 mm	d mm	A mm	C mm	E mm	F mm	L mm	I mm	H mm	G mm	Weight kg
0311312	12	35	32	52	119	83	60	460	31	132	33	8,0
0311314	17	42	38	60	146	98	63,5	501	31	132	33	10,5
0311315	25	50	45	74	178	127	70	565	31	132	33	16,5
0311316	35	57	50	83	197	138	76	604	31	132	33	20,5
0311318	55	70	65	105	255	185	88	712	31	132	33	42,0