


ExoFit™ Derrick Harness

The first of a new generation of harnesses designed especially for the oil extraction industry. Built for this harsh environment to offer the maximum comfort and performance to the user.

Rear fall arrest 40cm extension for ease of connecting of SRL

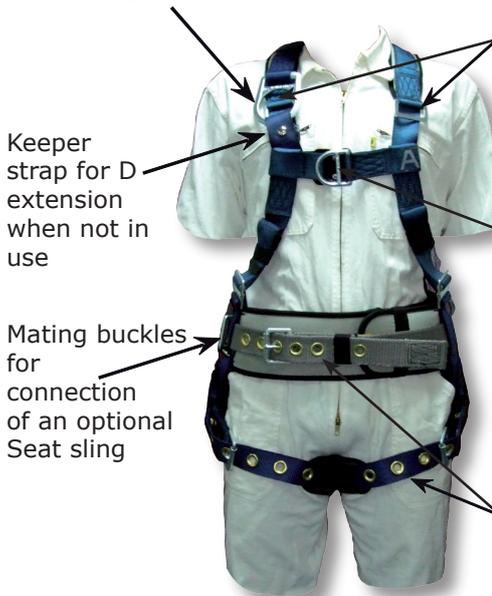

Keeper strap for D extension when not in use

Mating buckles for connection of an optional Seat sling

Mating buckles for connection of an optional derrick belt

Front fall arrest D-ring for vertical systems (ladder climbing)

Tongue buckle leg straps for fast and easy donning

Rear fall arrest D-ring

i-safe
equipped

Complies with CE - EN361/EN358 OSHA, ANSI and the stringent ANSI Z359



D-ring for positioning

Keeper strap

Especially designed for the oil extraction worker. It includes connection for optional derrick belt which provides the worker with restraint and comfort with the large frontal pad while positioning for the next drilling pipe. Alternatively on the rear of the harnesses belt there is a D connection point.

Seat sling as an option to reduce fatigue, whilst in suspension or work position and for use with man riding systems. Mating buckles on the belt of the harness allow for the connection of a seat sling

ExoFit design is based on the concept of a single piece of material constructed in the shape of an "X" that wraps around you for the ultimate in no-tangle donning and comfortable security. From the moment you put it on, the ExoFit exceeds anything you've ever worn in a fall protection harness. The materials are soft and light-weight, yet extremely durable. The shoulder, hip and leg padding is built-in so it can't slip.

Options:

Exofit Aluminum Seat Sling: KB01150064 (SM), KB01150068 (MED), KB01150069 (LG)

Webbing Seat Sling: KB01150082 (SM), KB01150083 (MED), KB01150084 (LG)

Derrick Board Belt: KB01000570

Specifications:

- **Exofit derrick Harness models:** KB11111620 (SM), KB11111621 (MED), KB11111622 (LG), KB11111623 (XL)
- **Webbing:** 45mm width, 100% Polyester, Minimum Breaking Strength >2600 daN
- **Thread:** High strength, 100% Polyester
- **D-rings:** Minimum Breaking Strength >2200 daN, Heat treated forged alloy steel, clear chromate zinc plating finish
- **Hardware:** Heat treated forged alloy steel, clear chromate zinc plating finish
- **Quick Connect buckles** (chest) : breaking strength >1700 daN, Heat treated alloy steel, zinc plating with black e-coat finish
- **i-Safe equipped:** Harness individual serially numbered
- **Net weight:** 3490g (MEDIUM SIZE)
- **System attachment:** points breaking Strength >15KN
- **Standards:** CE - EN361+EN358, OSHA and ANSI (ANSI Z359)